


Critical Hydronic Temp Sensing Application?

Need adjustable insertion depth to insure good thermal conductivity and fast response?

Desire a quick-change mount to remove sensor for calibration verification?

Need reliability in humid environments?

Require a small profile to accommodate pipe thermal insulation?

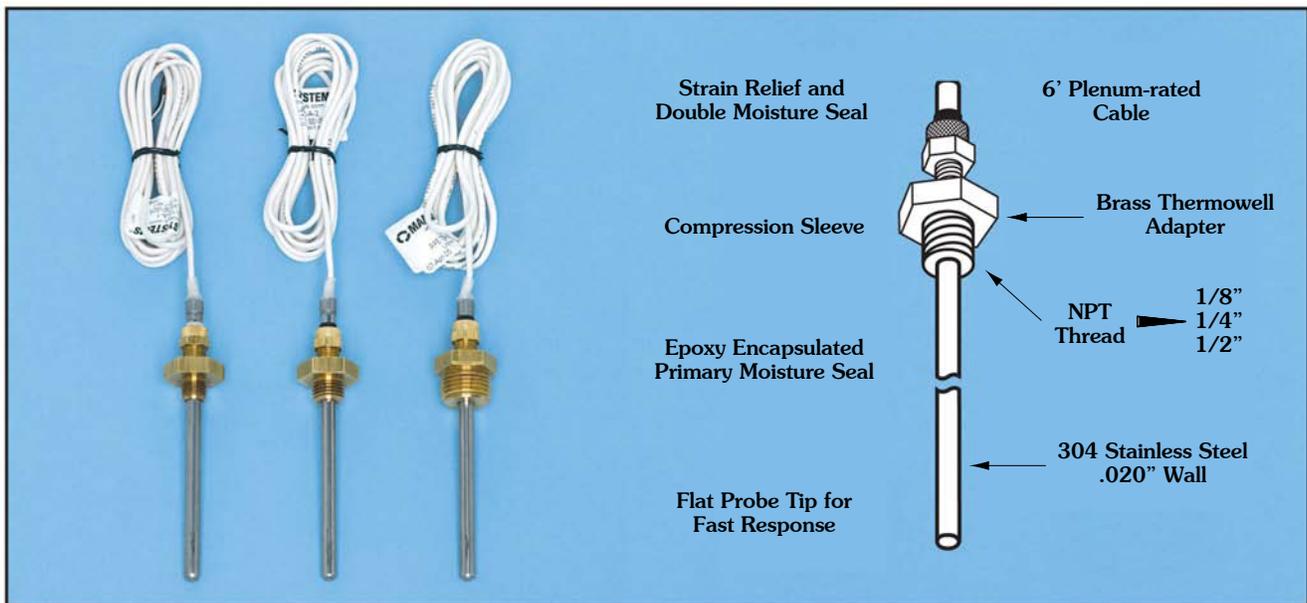

TE-703A Temperature Sensors incorporate unique design features to address the above requirements. Simply screw the brass adapter into the thermowell, insert the probe until it touches the bottom, tighten the compression sleeve, and you are done! To remove the probe for testing, loosen the compression sleeve and just pull it out.

More than 12 types of thermistors and RTDs for universal compatibility, triple moisture sealed for reliability, flat probe tip for direct thermal contact between sensing element and thermowell, low profile for fast and easy thermal insulation coverage and lowest installed cost!

MAMAC SYSTEMS®

8189 Century Boulevard • Minneapolis, MN 55317-8002 • USA
800-843-5116 • 952-556-4900 • Fax 952-556-4997
sales@mamacsys.com • www.mamacsys.com

4200 Waterside Centre
Solihull Parkway
Birmingham • West Midlands
B37 7YN • United Kingdom
01384-271113 • Fax 01384-271114

1 Fullerton Road #02-01
One Fullerton
Singapore • 049213
65-31581826 • Fax 65-31581826

4 Armiger Court, Unit 2
Adelaide • S.A.
5088 • Australia
08-8395-4333 • Fax 08-8395-4433

675 Cochrane Drive
East Tower • 6th Floor
Toronto • Ontario
L3R 0B8 • Canada
905-474-9215 • Fax 905-474-0876